


Specifications 规格

Nominal Voltage	12V	
Rated Capacity(20 hour rate)	5AH	
Dimensions ± 1mm	Length	91mm(3.58")
	Width	71mm(2.80")
	Height	100mm(3.94")
	Total Height (with terminals)	105mm(4.13")
Weight	Approx. 1.65kgs	
Standard Terminal	F1	
Optional Terminal	F2	

Discharge Characteristics(20°C,68°F)

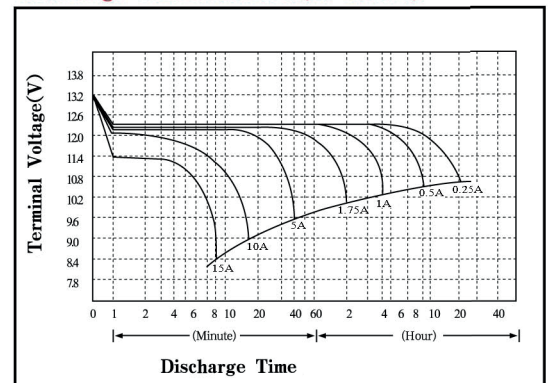

Electrical Specifications

Capacity 77°F(25°C)	20 hour rate (250mA)	5AH
	10 hour rate (460mA)	4.6AH
	5 hour rate (850mA)	4.25AH
	1 hour rate (3.0A)	3.0AH
Internal Resistance	Fully charged battery 77°F(25°C)	28mΩ
Capacity Affected by Temperature (20 hour rate)	104°F(40°C)	102%
	77°F(25°C)	100%
	32°F(0°C)	85%
	5°F(-15°C)	65%
Self-Discharge 77°F(25°C)	Capacity after 3 month storage	92%
	Capacity after 6 month storage	83%
	Capacity after 12 month storage	65%
Charge Constant Voltage	Cycle:Initial Charging Current less than 1.5A Voltage14.4-15.0V77°F(25°C) Standby:Voltage13.5-13.8V77°F(25°C)	

Discharge Characteristics(0°C/32°F,40°C/104°F)

