

60 Watt Monocrystalline Bendable Photovoltaic Module

Made with high efficiency back-contact solar cells

Electrical Characteristics


Max Power	Pmax	60W
Max Power Voltage	Vmp	17.5V
Max Power Current	Imp	3.43A
Open Circuit Voltage	Voc	21.0V
Short Circuit Current	Isc	3.84A
Maximum System Voltage		600V
Series Fuse Rating		10A

Temperature Co-efficients

Power	-0.38%/°C
Voltage	-60.8mV/°C
Current	2.2mA/°C

Cell Efficiency	19.6%
Number of Cells in Series	64
Max Power tolerance	±5%


Dimensions

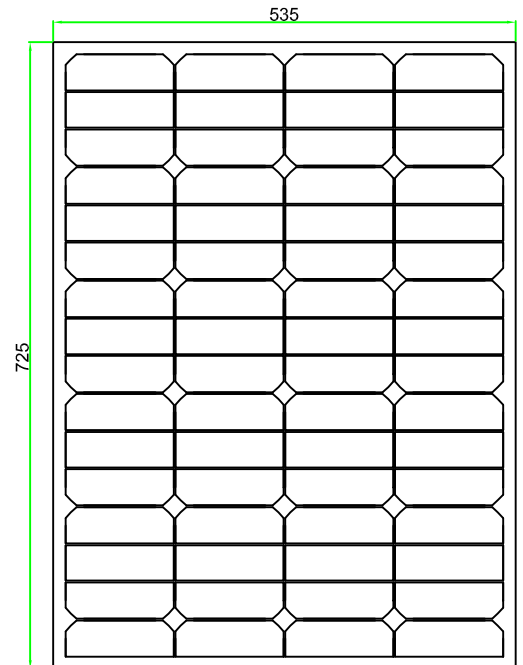


Mechanical Characteristics

Weight 0.93KG

Dimension 725*535*3

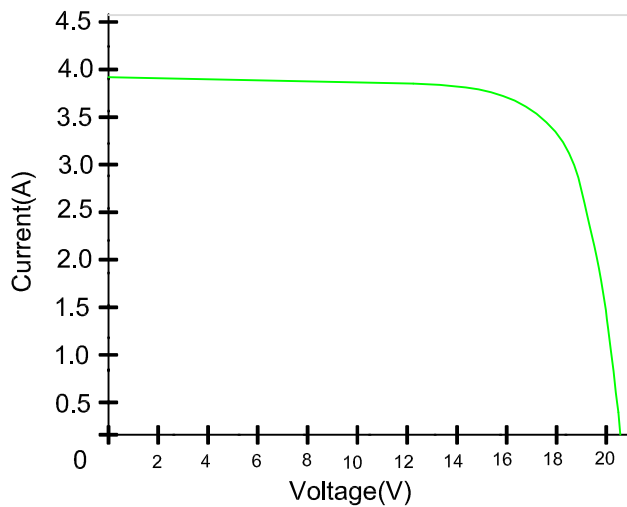

Note: All electrical parameters are rated at standard test conditions (irradiance of 1000W/m², AM 1.5G, cell temperature 77°F/25°C)



Maximum recommended bending degree: 30 degree