

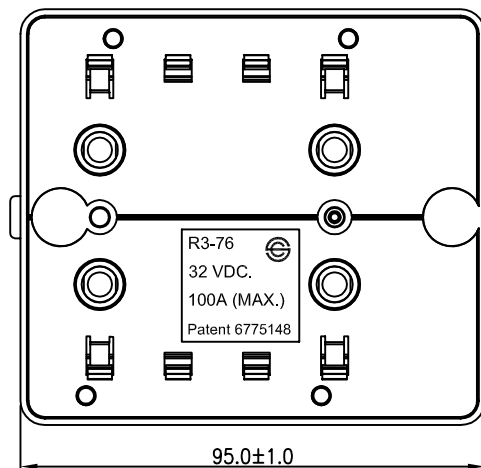
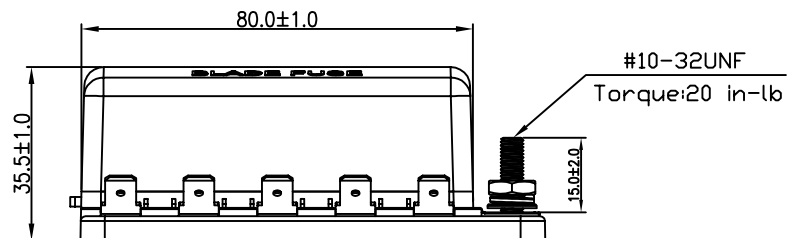
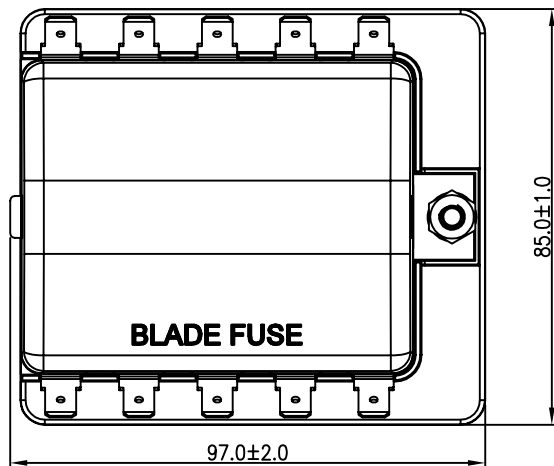


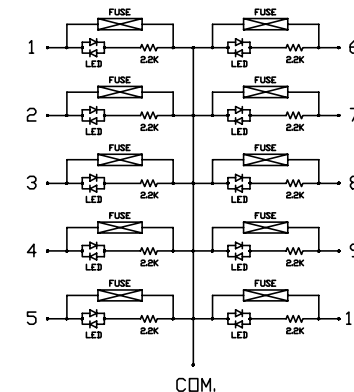


Voltage (Max.)	32 VDC.	Mounting Hole	
Input Terminal Rating	#10-32 threaded studs (100A. max.)		
Output Terminal Rating	30A max per circuit.		
Connection pad option available	Input wire size : #4-6 AWG.	Terminal Dim.	Blade Fuse Dim.
	Output wire size : #12-16 AWG		
Fuse Spec.	For Blade Fuses Used Only	Circuit Diagram	
Torque Rating	20in-lb (2.25Nm) max.		
Mounting Torque Rating	8in-lb (0.9Nm) max.		
Temperature Rating	-20° C to 85° C		

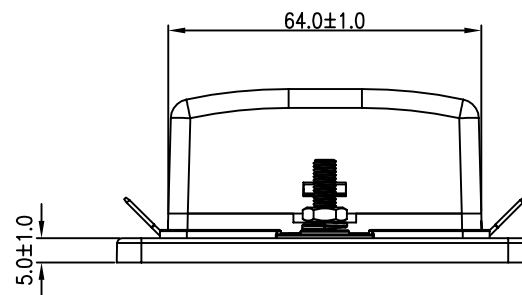

Material :
 Cover : PC. (Transparent)
 Housing , Base : PBT. (Black)
 Push Button : POM. (White)
 Terminal : Tin. plating Copper

Notes :
 1. Rating 100A max. tested by
 4 pcs. 25A load.

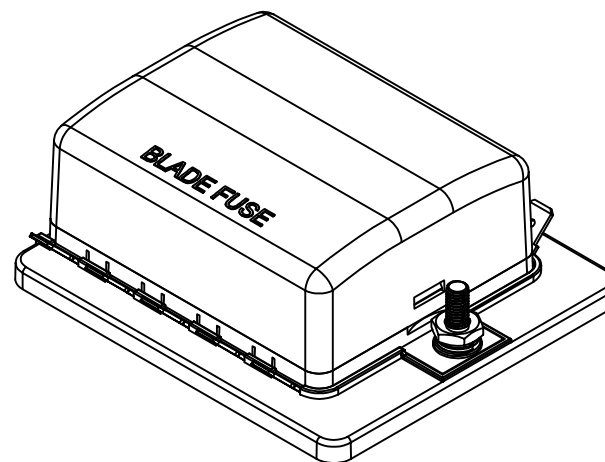

Sep.-22-09'	Frank	Upgrade specified voltage value	△	Drawn	Checked	Approved	SCI BOM No.	1310345	Model Name	BLADE FUSE BOX (10P)	
Jul.29-09'	Frank	update drawing version and add. tested description.	△	Frank Su.		Danny	Customer No.		Model No.	R3-76-01-3L110	REV.
Date	Name	Description	NO	Sep.-22-09'		09/22/'09	Unit	mm	SHIN CHIN INDUSTRIAL CO., LTD.		2