



mounting
systems



Trifix ProLine

Application	Ground mount, flat and pitched roofs
Height of Building	Depends on wind loads on site
PV modules	Framed, frameless and bifacial
Module layout	Rows up to approx. 12 m per frame unit
Module orientation	Landscape, portrait
Pitch	10°-15°, 20°-30°, 35-45° (different on request)
Supporting profiles	Extruded aluminium (ENAW 6063 T66)
Small parts	Stainless steel (V2A), Extruded aluminium (ENAW 6063 T66)
Colour	Aluminium: plate finish
Warranty	10 years



Ground mount



Flat roof



On roof



Framed Modules



Frameless Modules



Bifacial Modules



Landscape Orientation




Portrait Orientation



Standing seam clamp



Adapter for hanger bolts

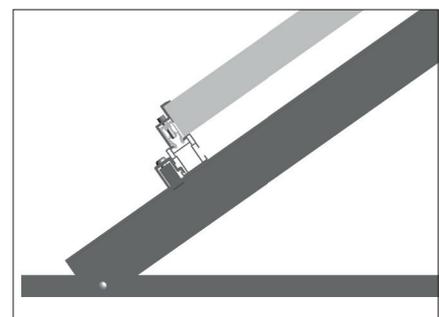

Side view construction



For further information: www.mounting-systems.com
Subject to technical changes.
2023 © Mounting Systems GmbH