

About the product

The Loxone Wallbox is a charging station which enables dynamic charging from 1.38kW to 11kW for electric vehicles. With the robust Tree interface, the device is integrated into the Loxone system and provides all the freedom for energy management. To record the electrical energy, an energy meter can be easily mounted on the integrated DIN-rail and connected to the Modbus interface in the device. Optionally, products like the NFC Code Touch, Touch Pure Flex,... can be mounted directly on the device to set your charging mode or execute any other control.

Ambient conditions

| | |
|------------------------------------|---|
| Ambient temperature | -20...50°C / -4...122°F |
| Ambient humidity | max. 95% r.H. (non condensing) |
| Degree of Protection | IP44 (IEC 60529) IK08 (IEC 62262) |
| Installation | Stationary, surface mount, vertical on wall or charging post |
| Recommended mounting height | Cable outlet: 132cm / 52" Top edge: 165cm / 65" |
| Altitude | max. 2000m |

Electrical Data

| Supply and Power | AC Input (mains) | 24V DC Input |
|--------------------------|---------------------------------|-----------------------------|
| Rated voltage | 3x 230/400V or 1x 230V, 50-60Hz | 18-24V |
| Current | 3x 16A or 1x 16A | max. 400mA |
| Power consumption | - | Standby: 0.3W, charging: 3W |

Charging

| | |
|-----------------------------------|--|
| Max. charging power | 11kW (3 phase 16A) / 3.7kW (1 phase 16A) configurable from 1.38kW to 3.7/11kW |
| Charging Mode | Mode 3 (IEC 61851-1) |
| Residual current detection | Internal, RDC-MD, DC 6mA, (IEC 62955) |
| Charging cable with plug | Type 2 plug (IEC 62196) 5 meter cable, 5x2.5mm ² + 1x0.5mm ² |

Interfaces

| | |
|--|---|
| Loxone Tree | connection with Miniserver / Tree Extension |
| Modbus RTU for connecting Energy meters | max. 1 device, max. 0,5m wire length, adjustable baud rate & parity, data types: 16 & 32 bit, min. polling cycle: 5s |

Installation must be carried out by a qualified electrician in accordance with the relevant regulations.



For more information
about this product, visit
loxone.com/help/wallbox-tree

**Loxone
Electronics GmbH**
Smart Home 1
4154 Kollerschlag
Austria

Loxone UK
The Forum
Station Road
Theale, RG7 4RA
United Kingdom



For additional information,
declaration of conformity, visit
www.loxone.com/datasheets

V120523


LOXONE

Wallbox 11kW 16A Tree

Need Help?
loxone.com/support



Part No.: 100526

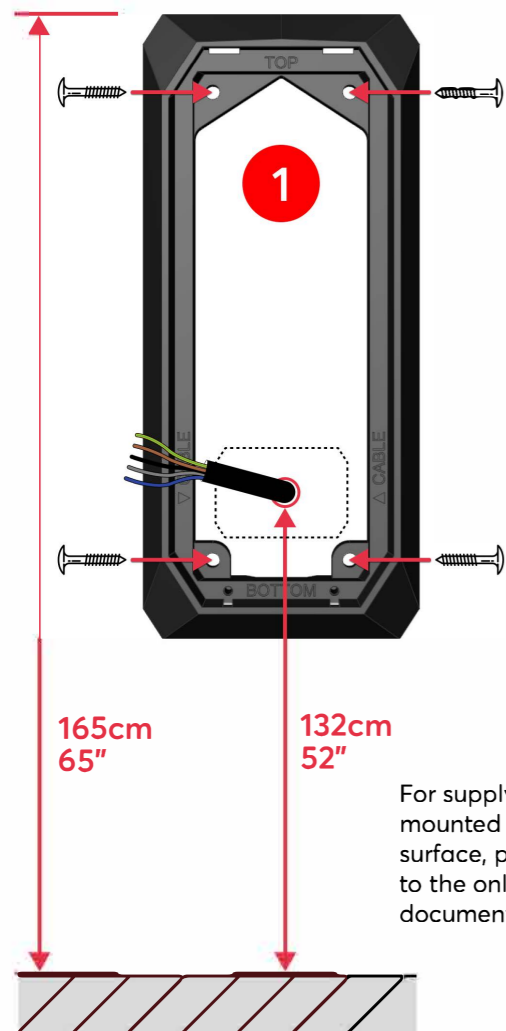

For supply cables mounted on the surface, please refer to the online documentation.

Torque: max. 2Nm / 1.48lb-ft

